



# Ultimizer Series

# Ultimizer Footprints

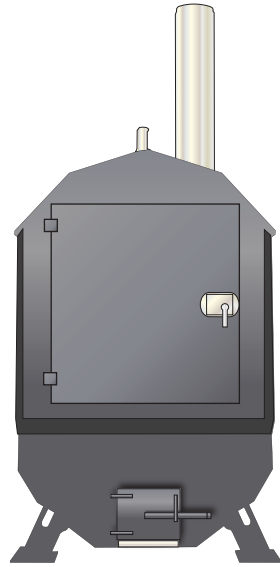

Front View

For exact dimensions for pads - see footpads of given models

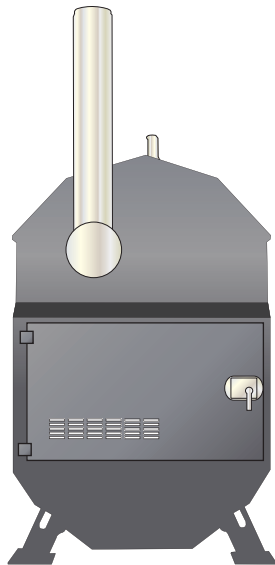

Rear View

## Ultimizer footprint Option Portage and Main Outdoor Furnace

## Brick lined Models

### Cement Block

#### ADVANTAGES

- Inexpensive, easy to acquire cement block
- Position is adjustable
- No extra equipment or tools necessary to install
- Easy to move or reposition in the future

#### DISADVANTAGES

- Blocks may degrade over time
- Blocks sometimes difficult to level with each other

### Cement Pad


#### ADVANTAGES

- Clean Area
- Easy to Level
- Durable

#### DISADVANTAGES

- Most costly of the two
- Position is permanent
- Extra equipment, tools and/or persons necessary to install
- Very hard to move or reposition in the future


Top View

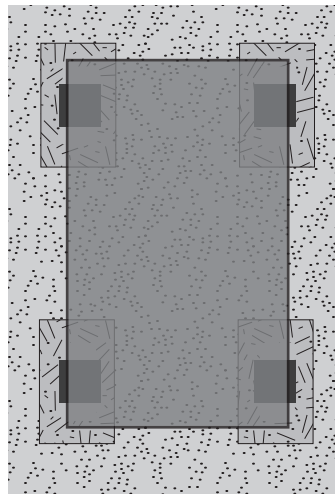

Side View

Area should be level and gravel filled

Top View

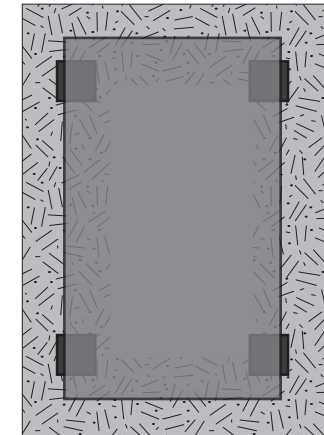

Side View